


STATE OF UTAH
DEPARTMENT OF NATURAL RESOURCES
DIVISION OF OIL, GAS AND MINING

FORM 3

AMENDED REPORT ☒

APPLICATION FOR PERMIT TO DRILL				1. WELL NAME and NUMBER NBU 1022-11		
2. TYPE OF WORK DRILL NEW WELL <input checked="" type="checkbox"/> REENTER P&A WELL <input type="checkbox"/> DEEPEN WELL <input type="checkbox"/>				3. FIELD OR WILDCAT NATURAL BUTTES		
4. TYPE OF WELL Gas Well Coalbed Methane Well: NO				5. UNIT or COMMUNITIZATION AGREEMENT NAME NATURAL BUTTES		
6. NAME OF OPERATOR KERR-MCGEE OIL & GAS ONSHORE, L.P.				7. OPERATOR PHONE 720 929-6587		
8. ADDRESS OF OPERATOR P.O. Box 173779, Denver, CO, 80217				9. OPERATOR E-MAIL mary.mondragon@anadarko.com		
10. MINERAL LEASE NUMBER (FEDERAL, INDIAN, OR STATE) UTU-011336		11. MINERAL OWNERSHIP FEDERAL <input checked="" type="checkbox"/> INDIAN <input type="checkbox"/> STATE <input type="checkbox"/> FEE <input type="checkbox"/>		12. SURFACE OWNERSHIP FEDERAL <input checked="" type="checkbox"/> INDIAN <input type="checkbox"/> STATE <input type="checkbox"/> FEE <input type="checkbox"/>		
13. NAME OF SURFACE OWNER (if box 12 = 'fee')				14. SURFACE OWNER PHONE (if box 12 = 'fee')		
15. ADDRESS OF SURFACE OWNER (if box 12 = 'fee')				16. SURFACE OWNER E-MAIL (if box 12 = 'fee')		
17. INDIAN ALLOTTEE OR TRIBE NAME (if box 12 = 'INDIAN')		18. INTEND TO COMMINGLE PRODUCTION FROM MULTIPLE FORMATIONS YES <input type="checkbox"/> (Submit Commingling Application) NO <input checked="" type="checkbox"/>		19. SLANT VERTICAL <input checked="" type="checkbox"/> DIRECTIONAL <input type="checkbox"/> HORIZONTAL <input type="checkbox"/>		
20. LOCATION OF WELL	FOOTAGES	QTR-QTR	SECTION	TOWNSHIP	RANGE	MERIDIAN
LOCATION AT SURFACE	1877 FSL 1130 FEL	NESE	1	10.0 S	22.0 E	S
Top of Uppermost Producing Zone	1877 FSL 1130 FEL	NESE	1	10.0 S	22.0 E	S
At Total Depth	1877 FSL 1130 FEL	NESE	1	10.0 S	22.0 E	S
21. COUNTY UINTAH		22. DISTANCE TO NEAREST LEASE LINE (Feet) 1130		23. NUMBER OF ACRES IN DRILLING UNIT 522		
		25. DISTANCE TO NEAREST WELL IN SAME POOL (Applied For Drilling or Completed) 1000		26. PROPOSED DEPTH MD: 8450 TVD:		
27. ELEVATION - GROUND LEVEL 5104		28. BOND NUMBER WYB000291		29. SOURCE OF DRILLING WATER / WATER RIGHTS APPROVAL NUMBER IF APPLICABLE Water permit # 43-8496		
ATTACHMENTS						
VERIFY THE FOLLOWING ARE ATTACHED IN ACCORDANCE WITH THE UTAH OIL AND GAS CONSERVATION GENERAL RULES						
<input checked="" type="checkbox"/> WELL PLAT OR MAP PREPARED BY LICENSED SURVEYOR OR ENGINEER			<input checked="" type="checkbox"/> COMPLETE DRILLING PLAN			
<input type="checkbox"/> AFFIDAVIT OF STATUS OF SURFACE OWNER AGREEMENT (IF FEE SURFACE)			<input type="checkbox"/> FORM 5. IF OPERATOR IS OTHER THAN THE LEASE OWNER			
<input type="checkbox"/> DIRECTIONAL SURVEY PLAN (IF DIRECTIONALLY OR HORIZONTALLY DRILLED)			<input checked="" type="checkbox"/> TOPOGRAPHICAL MAP			
NAME Kevin McIntyre		TITLE Regulatory Analyst I		PHONE 720 929-6226		
SIGNATURE		DATE 09/15/2008		EMAIL Kevin.McIntyre@anadarko.com		
API NUMBER ASSIGNED 43047500750000		APPROVAL  Permit Manager				

Proposed Hole, Casing, and Cement						
String	Hole Size	Casing Size	Top (MD)	Bottom (MD)		
Surf	12.25	9.625	0	2000		
Pipe	Grade	Length	Weight			
	Grade J-55 LT&C	2000	36.0			
	Cement Interval	Top (MD)	Bottom (MD)			
		0	2000			
		Cement Description	Class	Sacks	Yield	Weight
			Premium Foamed Cement	215	1.18	15.6

Proposed Hole, Casing, and Cement						
String	Hole Size	Casing Size	Top (MD)	Bottom (MD)		
Prod	7.875	4.5	0	8450		
Pipe	Grade	Length	Weight			
	Grade I-80 LT&C	8450	11.6			
	Cement Interval	Top (MD)	Bottom (MD)			
		0	8450			
		Cement Description	Class	Sacks	Yield	Weight
			Premium Lite High Strength	400	3.38	11.0
			Pozzuolanic Cement	1350	1.31	14.3



KERR-McGEE OIL & GAS ONSHORE LP

DRILLING PROGRAM

COMPANY NAME KERR-McGEE OIL & GAS ONSHORE LP DATE August 12, 2008
 WELL NAME NBU 1022-11 TD 8,450' MD/TVD _____
 FIELD Natural Buttes COUNTY Uintah STATE Utah ELEVATION 5,104' GL KB 5,119'
 SURFACE LOCATION NESE 1877' FSL & 1130' FEL, SEC. 1, T10S, R22E BHL Straight Hole
 Latitude: 39.975856 Longitude: -109.382161 NAD 27 _____
 OBJECTIVE ZONE(S) Wasatch/Mesaverde
 ADDITIONAL INFO Regulatory Agencies: BLM (MINERALS and SURFACE), UDOGM, Tri-County Health Dept.

GEOLOGICAL			MECHANICAL		
LOGS	FORMATION	DEPTH	HOLE SIZE	CASING SIZE	MUD WEIGHT
		40'		14"	
			12-1/4"	9-5/8", 36#, J-55, LTC	Air mist
Catch water sample, if possible, from 0 to 4,145'					
	Green River @	1,111'			
	Top of Birds Nest Water @	1,389'			
	Mahogany @	1,900'			
	Preset f/ GL @				
		2,000' MD			
Note: 12.25" surface hole will usually be drilled $\pm 400'$ below the bottom of lost circulation zone. Drilled depth may be $\pm 200'$ of the estimated set depth depending on the actual depth of the loss zone.					
Mud logging program TBD Open hole logging program f/ TD - surf csg					
	Wasatch @	4,145'			
	Mverde @	6,339'			
	MVU2 @	7,279'			
	MVL1 @	7,845'			
			7-7/8"	4-1/2", 11.6#, I-80 or equivalent LTC casing	Water/Fresh Water Mud 8.3-10.0 ppg
					Max anticipated Mud required 11.5 ppg
		TD @ 8,450'			



KERR-McGEE OIL & GAS ONSHORE LP

DRILLING PROGRAM

CASING PROGRAM

	SIZE	INTERVAL	WT.	GR.	CPLG.	DESIGN FACTORS		
						BURST	COLLAPSE	TENSION
CONDUCTOR	14"	0-40'				3520	2020	453000
SURFACE	9-5/8"	0 to 2000	36.00	J-55	LTC	1.10	2.16	8.01
						7780	6350	201000
PRODUCTION	4-1/2"	0 to 8450	11.60	I-80	LTC	2.44	1.26	2.35

- 1) Max Anticipated Surf. Press.(MASP) (Surface Casing) = (Pore Pressure at next csg point-(0.22 psi/ft-partial evac gradient x TVD of next csg point))
 2) MASP (Prod Casing) = Pore Pressure at TD - (.22 psi/ft-partial evac gradient x TD)
 (Burst Assumptions: TD = 11.5 ppg) .22 psi/ft = gradient for partially evac wellbore
 (Collapse Assumption: Fully Evacuated Casing, Max MW) (Tension Assumptions: Air Weight of Casing*Buoy.Fact. of water)
 MASP 3380 psi

CEMENT PROGRAM

		FT. OF FILL	DESCRIPTION	SACKS	EXCESS	WEIGHT	YIELD
SURFACE	LEAD	500	Premium cmt + 2% CaCl + .25 pps flocele	215	60%	15.60	1.18
Option 1	TOP OUT CMT (1)	200	20 gals sodium silicate + Premium cmt + 2% CaCl + .25 pps flocele	50		15.60	1.18
	TOP OUT CMT (2)	as required	Premium cmt + 2% CaCl	as req.		15.60	1.18
SURFACE		NOTE: If well will circulate water to surface, option 2 will be utilized					
Option 2	LEAD	1500	Prem cmt + 16% Gel + 10 pps gilsonite + .25 pps Flocele + 3% salt BWOC	170	35%	11.00	3.82
	TAIL	500	Premium cmt + 2% CaCl + .25 pps flocele	180	35%	15.60	1.18
	TOP OUT CMT	as required	Premium cmt + 2% CaCl	as req.		15.60	1.18
PRODUCTION	LEAD	3,640'	Premium Lite II + 3% KCl + 0.25 pps celloflake + 5 pps gilsonite + 10% gel + 0.5% extender	400	60%	11.00	3.38
	TAIL	4,810'	50/50 Poz/G + 10% salt + 2% gel + .1% R-3	1350	60%	14.30	1.31

*Substitute caliper hole volume plus 0% excess for LEAD if accurate caliper is obtained

*Substitute caliper hole volume plus 10% excess for TAIL if accurate caliper is obtained

FLOAT EQUIPMENT & CENTRALIZERS

SURFACE	Guide shoe, 1 jt, insert float. Centralize first 3 joints with bow spring centralizers. Thread lock guide shoe.
PRODUCTION	Float shoe, 1 jt, float collar. Centralize first 3 joints & every third joint to top of tail cement with bow spring centralizers.

ADDITIONAL INFORMATION

Test casing head to 750 psi after installing. Test surface casing to 1,500 psi prior to drilling out.

BOPE: 11" 5M with one annular and 2 rams. Test to 5,000 psi (annular to 2,500 psi) prior to drilling out. Record on chart recorder & tour sheet. Function test rams on each trip. Maintain safety valve & inside BOP on rig floor at all times. Kelly to be equipped with upper & lower kelly valves.

Drop Totco surveys every 2000'. Maximum allowable hole angle is 5 degrees.

Most rigs have PVT Systems for mud monitoring. If no PVT is available, visual monitoring will be utilized.

DRILLING ENGINEER:

Brad Laney

DATE:

DRILLING SUPERINTENDENT:

Randy Bayne

NBU 1022-11.xls

DATE:

NBU 1022-1I
NESE Sec. 1, T10S,R22E
UINTAH COUNTY, UTAH
UTU-011336

ONSHORE ORDER NO. 1

DRILLING PROGRAM

1. Estimated Tops of Important Geologic Markers:

<u>Formation</u>	<u>Depth</u>
Uinta	0- Surface
Green River	1111'
Bird's Nest	1389'
Mahogany	1900'
Wasatch	4145'
Mesaverde	6339'
MVU2	7279'
MVL1	7845'
TD	8450'

2. Estimated Depths of Anticipated Water, Oil, Gas, or Mineral Formations:

<u>Substance</u>	<u>Formation</u>	<u>Depth</u>
	Green River	1111'
	Bird's Nest	1389'
	Mahogany	1900'
Gas	Wasatch	4145'
Gas	Mesaverde	6339'
Gas	MVU2	7279'
Gas	MVL1	7845'
Water	N/A	
Other Minerals	N/A	

3. Pressure Control Equipment (Schematic Attached)

Please see the Natural Buttes Unit Standard Operating Procedure (SOP).

4. Proposed Casing & Cementing Program:

Please see the Natural Buttes Unit SOP.

5. Drilling Fluids Program:

Please see the Natural Buttes Unit SOP.

6. Evaluation Program:

Please see the Natural Buttes Unit SOP.

7. **Abnormal Conditions:**

Maximum anticipated bottomhole pressure calculated at 8450' TD, approximately equals 5239 psi (calculated at 0.62 psi/foot).

Maximum anticipated surface pressure equals approximately 3380 psi (bottomhole pressure minus the pressure of a partially evacuated hole calculated at 0.22 psi/foot).

8. **Anticipated Starting Dates:**

Drilling is planned to commence immediately upon approval of this application.

9. **Variances:**

*Please see Natural Buttes Unit SOP Onshore Order #2 – Air Drilling Variance
Kerr-McGee Oil & Gas Onshore LP (KMG) respectfully requests a variance to several requirements associated with air drilling outlined in Onshore Order 2*

- *Blowout Prevention Equipment (BOPE) requirements;*
- *Mud program requirements; and*
- *Special drilling operation (surface equipment placement) requirements associated with air drilling.*

This Standard Operating Practices addendum provides supporting information as to why KMG current air drilling practices for constructing the surface casing hole should be granted a variance to Onshore Order 2 air drilling requirements.

The reader should note that the air rig is used only to construct a stable surface casing hole through a historically difficult lost circulation zone. A conventional rotary rig follows the air rig, and is used to drill and construct the majority of the wellbore.

More notable, KMG has used the air rig layout and procedures outlined below to drill the surface casing hole in approximately 675 wells without incident of blow out or loss of life.

Background

In a typical well, KMG utilizes an air rig for drilling the surface casing hole, an interval from the surface to surface casing depths, which varies in depth from 1,700 to 2,800 feet.

The air rig drilling operation does not drill through productive or over pressured formations in KMG field, but does penetrate the Uinta and Green River Formations. The purpose of the air drilling operation is to overcome the severe loss circulation zone in the Green River known as the Bird's Nest while creating a stable hole for the surface casing. The surface casing hole is generally drilled to approximately 500 feet below the Bird's Nest.

Before the surface air rig is mobilized, a rathole rig is utilized to set and cement conductor pipe through a competent surface formation. Generally, the conductor is set at 40 feet. In some cases, conductor may be set deeper in areas that the surface formation is not found competent. This rig also drills the rat and mouse holes in preparation for the surface casing and production string drilling operations.

The air rig is then mobilized to drill the surface casing hole by drilling a 12-1/4 inch hole to just above the Bird's Nest interval with an air hammer. The hammer is then tripped

and replaced with a 12-1/4 inch tri-cone bit. The tri-cone bit is used to drill to the surface casing point, approximately 500 feet below the loss circulation zone (Bird's Nest). The 9-5/8 inch surface casing is then run and cemented in place, thereby isolating the lost circulation zone.

KMG fully appreciates Onshore Order 2 well control and safety requirements associated with a typical air drilling operations. However, the requirements of Onshore Order 2 are excessive with respect to the air rig layout and drilling operation procedures that are currently in practice to drill and control the surface casing hole in KMG Fields.

Variance for BOPE Requirements

The air rig operation utilizes a properly lubricated and maintained air bowl diverter system which diverts the drilling returns to a six-inch blooie line. The air bowl is the only piece of BOPE equipment which is installed during drilling operations and is sufficient to contain the air returns associated with this drilling operation. As was discussed earlier, the drilling of the surface hole does not encounter any over pressured or productive zones, and as a result standard BOPE equipment should not be required. In addition, standard drilling practices do not support the use of BOPE on 40 feet of conductor pipe.

Variance for Mud Material Requirements

Onshore Order 2 also states that sufficient quantities of mud materials shall be maintained or readily accessible for the purpose of assuring adequate well control. Once again, the surface hole drilling operations does not encounter over pressured or productive intervals, and as a result there is not a need to control pressure in the surface hole with a mud system. Instead of mud, the air rigs utilize water from the reserve pit for well control, if necessary. A skid pump which is located near the reserve pit (see attachment) will supply the water to the well bore.

Variance for Special Drilling Operation (surface equipment placement) Requirements

Onshore Order 2 requires specific safety distances or setbacks for the placement of associated standard air drilling equipment, wellbore, and reserve pits. The air rigs used to drill the surface holes are not typical of an air rig used to drill a producing hole in other parts of the US. These are smaller in nature and designed to fit a KMG location. The typical air rig layout for drilling surface hole in the field is attached.

Typically the blooie line discharge point is required to be 100 feet from the well bore. In the case of a KMG well, the reserve pit is only 45 feet from the rig and is used for the drill cuttings. The blooie line, which transports the drill cuttings from the well to the reserve pit, subsequently discharges only 45 feet from the well bore.

Typically the air rig compressors are required to be located in the opposite direction from the blooie line and a minimum of 100 feet from the well bore. At the KMG locations, the air rig compressors are approximately 40 feet from the well bore and approximately 60 feet from the blooie line discharge due to the unique air rig design. The air compressors (see attachment) are located on the rig (1250 cfm) and on a standby trailer (1170 cfm). A booster sits between the two compressors and boosts the output from 350 psi to 2000 psi. The design does put the booster and standby compressor opposite from the blooie line.

Lastly, Onshore Order 2 addresses the need for an automatic igniter or continuous pilot light on the blooie line. The air rig does not utilize an igniter as the surface hole drilling

operation does not encounter productive formations.



Conclusion

The air rig operating procedures and the attached air rig layout have effectively maintained well control while drilling the surface holes in KMG Fields. KMG respectfully requests a variance from Onshore Order 2 with respect to air drilling well control requirements as discussed above..

10. Other Information:

Please see Natural Buttes Unit SOP.

EXHIBIT A

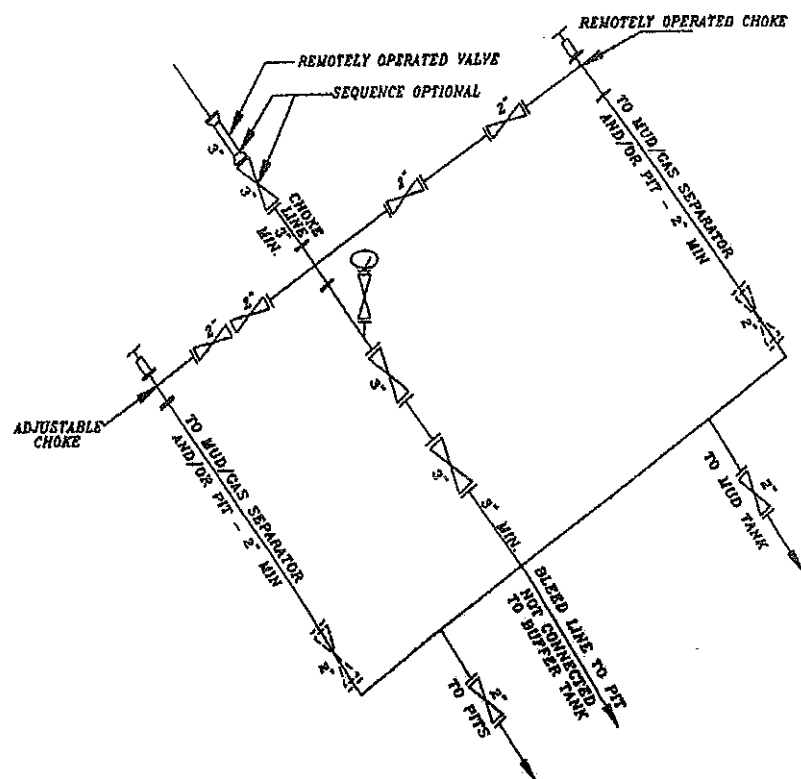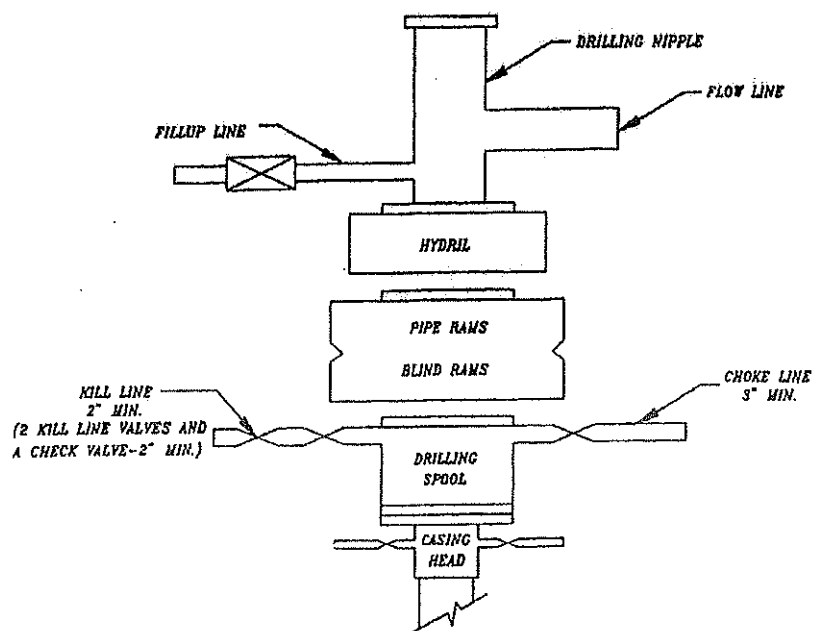

SCHEMATIC DIAGRAM OF 5,000 PSI BOP STACK

**NBU 1022-1I
NESE Sec. 1,T10S,R22E
UINTAH COUNTY, UTAH
UTU-011336**

ONSHORE ORDER NO. 1

MULTI-POINT SURFACE USE & OPERATIONS PLAN

1. Existing Roads:

Refer to the attached location directions.

Refer to Topo Maps A and B for location of access roads within a 2-mile radius.

2. Planned Access Roads:

Approximately 514' +/- of new access road is proposed. Refer to Topo Map B.

Existence of pipelines; maximum grade; turnouts; major cut and fills, culverts, or bridges; gates, cattle guards, fence cuts, or modifications to existing facilities were determined at the on-site.

The access road was centerline flagged during time of staking.

Please see the Natural Buttes Unit Standard Operating Procedure (SOP).

3. Location of Existing Wells Within a 1-Mile Radius:

Please refer to Topo Map C.

4. Location of Existing & Proposed Facilities:

Please see the Natural Buttes Unit SOP.

Refer to Topo Map D for the location of the proposed pipelines.

A 1,540' rights-of-way will be required. Approximately 1,540' of 4" steel pipeline is proposed from the location to the tie-in point in Section 1, T10S, R22E. Please refer to the Topo Map D. The pipeline will be constructed utilizing existing rights were possible and pulled into place using a rubber tired tractor. The pipeline will be butt-welded together.

Variances to Best Management Practices (BMPs) Requested:

Approximately 1,540' of 4" steel pipeline will be installed on surface within the access corridor for the well location. As a Best Management Practice (BMP), the pipeline would be buried within the access road corridor if possible. The construction of pipelines requires the corridor of 30 feet.

This exception to the BMP should be granted by the BLM Authorized Officer because indurated bedrock, such as sandstone, is at or within 2 feet of the surface and the soil has a poor history for successful rehabilitation.

All facilities will be painted within six months of installation. Facilities required to comply with the Occupational Safety and Health Act (OSHA) will be excluded. The requested color is Carlsbad Canyon Brown (2.5Y 6/2), a non-reflective earthtone.

Interim Surface Reclamation Plan:

This exception is requested due to the current twin and multi-well program. If determined that this well will not be a candidate for either twinning &/or multi-well the operator shall spread the topsoil pile on the location up to the rig anchor points. The location will be reshaped to the original contour to the extent possible. The operator will reseed the area using the BLM recommended seed mixture and reclamation methods.

5. Location and Type of Water Supply:

Please see the Natural Buttes SOP.

6. Source of Construction Materials:

Please see the Natural Buttes SOP.

7. Methods of Handling Waste Materials:

Please see the Natural Buttes SOP.

A plastic reinforced liner is to be used as discussed during on-site inspection. It will be a minimum of **20 mil thick and felt**, with sufficient bedding used to cover any rocks. The liner will overlap the pit walls and be covered with dirt and/or rocks to hold it in place. No trash or scrap that could puncture the liner will be disposed of in the pit.

Any produced water from the proposed well will be contained in a water tank and will then be hauled by truck to one of the pre-approved disposal sites: RNI, Sec. 5, T9S, R22E, NBU #159, Sec. 35, T9S R21E, Ace Oilfield, Sec. 2, T6S, R20E, MC&MC, Sec. 12, T6S, R19E, Pipeline Facility Sec. 36, T9S, R20E, Goat Pasture Evaporation Pond SW/4 Sec. 16, T10S, R22E, Bonanza Evaporation Pond Sec. 2, T10S, R23E (*Request is in lieu of filing Form 3160-5, after initial production*).

8. Ancillary Facilities:

Please see the Natural Buttes SOP.

9. **Well Site Layout:** (See Location Layout Diagram)

The attached Location Layout Diagram describes drill pad cross-sections, cuts and fills, and locations of the mud tanks, reserve pit, flare pit, pipe racks, trailer parking, spoil dirt stockpile(s), and surface material stockpile(s).

Please see the attached diagram to describe rig orientation, parking areas, and access roads.

Location size may change prior to the drilling of the well due to the current rig availability. If the proposed location is not large enough to accommodate the drilling rig. The location will be re-surveyed and a form 3160-5 will be submitted.

10. **Plans for Reclamation of the Surface:**

Please see the Natural Buttes SOP.

upon reclamation of the pit the following seed mixture will be used. A total of 12 lbs/acre will be used if the seeds are drilled (24 lbs/acre if the seeds are broadcast). The per acre requirements for *drilled* seed are:

Galleta Grass	8 lbs.
Shadscale	8 lbs.

Operator shall call the BLM for the seed mixture when final reclamation occurs.

11. **Surface/Mineral Ownership:**

United States of America
Bureau of Land Management
170 South 500 East
Vernal, UT 84078
(435)781-4400

12. **Stipulations:**

- **Antelope Stipulations**

No construction from May 15 through June 20.

Critical Soils Stipulations:

No construction when wet.

13. **Other Information:**

A Class III archaeological survey and a paleontological survey have been performed and will be submitted.

This location is not within 460' from the boundary of the Natural Buttes Unit, nor is it within 460' of any non-committed tract lying within the boundaries of the Unit.

13. **Lessee's or Operator's Representative & Certification:**

Kevin McIntyre
Regulatory Analyst I
Kerr-McGee Oil & Gas Onshore LP
P.O. Box 173779
Denver, CO 80217-3779
(720) 929-6226

Randy Bayne
Drilling Manager
Kerr-McGee Oil & Gas Onshore LP
1368 South 1200 East
Vernal, UT 84078
(435) 781-7018


Certification: All lease and/or unit operations will be conducted in such a manner that full compliance is made with all applicable laws, regulations, Onshore Oil and Gas Orders, the approved Plan of Operations, and any applicable Notice to Lessees.

Kerr-McGee Oil & Gas Onshore LP is considered to be the operator of the subject well. Kerr-McGee Oil & Gas Onshore LP agrees to be responsible under the terms and conditions of the lease for the operations conducted upon leased lands.

The Operator will be fully responsible for the actions of its subcontractors. A complete copy of the approved "Application for Permit to Drill" will be furnished to the field representative(s) to ensure compliance and shall be on location during all construction and drilling operations.

Bond coverage pursuant to 43 CFR 3104 for lease activities is being provided by Bureau of Land Management Nationwide Bond #WYB000291.

I hereby certify that I, or persons under my supervision, have inspected the proposed drill site and access route, that I am familiar with the conditions that currently exist; that the statements made in this plan are, to the best of my knowledge, true and correct; and the work associated with the operations proposed herein will be performed by the Operator, its contractors, and subcontractors in conformity with this plan and the terms and conditions under which it is approved.


Kevin McIntyre

8/12/2008

Date

Kerr-McGee Oil & Gas Onshore LP
NBU #1022-1I
SECTION 1, T10S, R22E, S.L.B.&M.

PROCEED IN A WESTERLY DIRECTION FROM VERNAL, UTAH ALONG U.S. HIGHWAY 40 APPROXIMATELY 14.0 MILES TO THE JUNCTION OF STATE HIGHWAY 88; EXIT LEFT AND PROCEED IN A SOUTHERLY DIRECTION APPROXIMATELY 17.0 MILES TO OURAY, UTAH; PROCEED IN A SOUTHERLY DIRECTION APPROXIMATELY 0.3 MILES ON THE SEEP RIDGE ROAD TO THE JUNCTION OF THIS ROAD AND AN EXISTING ROAD TO THE EAST; TURN LEFT AND PROCEED IN AN EASTERLY DIRECTION APPROXIMATELY 12.3 MILES TO THE JUNCTION OF THIS ROAD AND AN EXISTING ROAD TO THE SOUTH; TURN RIGHT AND PROCEED IN A SOUTHERLY DIRECTION APPROXIMATELY 1.7 MILES TO THE JUNCTION OF THIS ROAD AND AN EXISTING ROAD TO THE EAST; TURN LEFT AND PROCEED IN AN EASTERLY DIRECTION APPROXIMATELY 1.9 MILES TO THE JUNCTION OF THIS ROAD AND AN EXISTING ROAD TO THE SOUTHEAST; TURN RIGHT AND PROCEED IN A SOUTHEASTERLY DIRECTION APPROXIMATELY 0.5 MILES TO THE JUNCTION OF THIS ROAD AND AN EXISTING ROAD TO THE SOUTHWEST; TURN RIGHT AND PROCEED IN A SOUTHWESTERLY, THEN SOUTHEASTERLY DIRECTION APPROXIMATELY 1.4 MILES TO THE JUNCTION OF THIS ROAD AND AN EXISTING ROAD TO THE EAST; TURN LEFT AND PROCEED IN AN EASTERLY, THEN SOUTHWESTERLY DIRECTION APPROXIMATELY 5.1 MILES TO THE BEGINNING OF THE PROPOSED ACCESS FOR THE #631-1E TO THE EAST; FOLLOW ROAD FLAGS IN AN EASTERLY DIRECTION APPROXIMATELY 0.1 MILES TO THE BEGINNING OF THE PROPOSED ACCESS TO THE SOUTH; FOLLOW ROAD FLAGS IN A SOUTHERLY DIRECTION APPROXIMATELY 514' TO THE PROPOSED LOCATION.

TOTAL DISTANCE FROM VERNAL, UTAH TO THE PROPOSED WELL LOCATION IS APPROXIMATELY 54.4 MILES.

Kerr-McGee Oil & Gas Onshore LP

NBU #1022-1I

LOCATED IN UTAH COUNTY, UTAH
SECTION 1, T10S, R22E, S.L.B.&M.

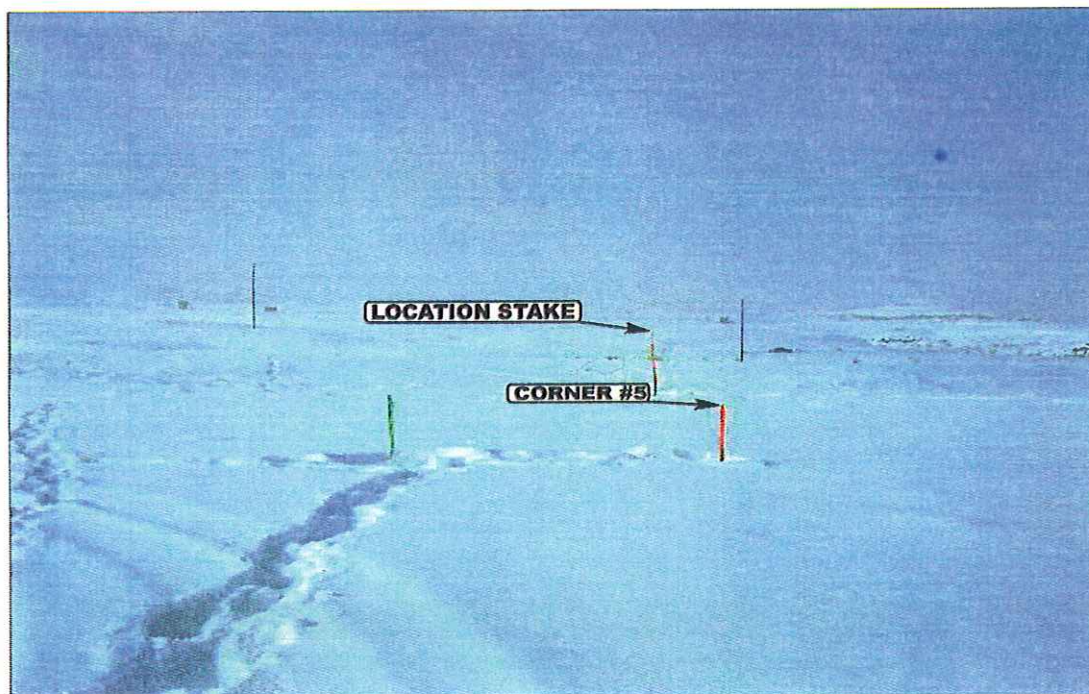


PHOTO: VIEW FROM CORNER #5 TO LOCATION STAKE

CAMERA ANGLE: WESTERLY



PHOTO: VIEW FROM BEGINNING OF PROPOSED ACCESS

CAMERA ANGLE: EASTERLY



- Since 1964 -

UELS Uintah Engineering & Land Surveying
85 South 200 East Vernal, Utah 84078
435-789-1017 uels@uelsinc.com

LOCATION PHOTOS

01	29	08
MONTH	DAY	YEAR

PHOTO

TAKEN BY: A.F.

DRAWN BY: G.L.

REVISED: 00-00-00

Kerr-McGee Oil & Gas Onshore LP

NBU #1022-11

PIPELINE ALIGNMENT

LOCATED IN UINTAH COUNTY, UTAH

SECTION 1, T10S, R22E, S.L.B.&M.



PHOTO: VIEW ALONG PROPOSED PIPELINE

CAMERA ANGLE: SOUTHEASTERLY



PHOTO: VIEW FROM OF PROPOSED TIE IN POINT

CAMERA ANGLE: NORTHWESTERLY



- Since 1964 -

**U
E
L
S** Uintah Engineering & Land Surveying
85 South 200 East Vernal, Utah 84078
435-789-1017 uels@uelsinc.com

PIPELINE PHOTOS

01 29 08
MONTH DAY YEAR

PHOTO

TAKEN BY: A.F.

DRAWN BY: G.L.

REVISED: 00-00-00

T10S, R22E, S.L.B.&M.

R
22
E

R
23
E

Kerr-McGee Oil & Gas Onshore LP


Well location, NBU #1022-11, located as shown in the NE 1/4 SE 1/4 of Section 1, T10S, R22E, S.L.B.&M., Uintah County, Utah.

BASIS OF ELEVATION

BENCH MARK (20EAM) LOCATED IN THE SE 1/4 OF SECTION 35, T8S, R21E, S.L.B.&M. TAKEN FROM THE OURAY SE QUADRANGLE, UTAH, UTAH COUNTY, 7.5 MINUTE SERIES (TOPOGRAPHICAL MAP) PUBLISHED BY THE UNITED STATES DEPARTMENT OF THE INTERIOR, GEOLOGICAL SURVEY. SAID ELEVATION IS MARKED AS BEING 4697 FEET.

BASIS OF BEARINGS

BASIS OF BEARINGS IS A G.P.S. OBSERVATION.



SCALE


CERTIFICATE

THIS IS TO CERTIFY THAT THE ABOVE PLAT WAS PREPARED FROM FIELD NOTES OF ACTUAL SURVEYS MADE BY ME OR UNDER MY SUPERVISION AND THAT THE SAME ARE TRUE AND CORRECT TO THE BEST OF MY KNOWLEDGE AND BELIEF.

[Signature]
REGISTERED LAND SURVEYOR
REGISTRATION NO. 161319
STATE OF UTAH

UINTAH ENGINEERING & LAND SURVEYING
85 SOUTH 200 EAST - VERNAL, UTAH 84078
(435) 789-1017

SCALE 1" = 1000'	DATE SURVEYED: 01-10-08	DATE DRAWN: 01-11-08
PARTY A.F. B.A. C.P.	REFERENCES G.L.O. PLAT	
WEATHER COLD	FILE Kerr-McGee Oil & Gas Onshore L.P.	

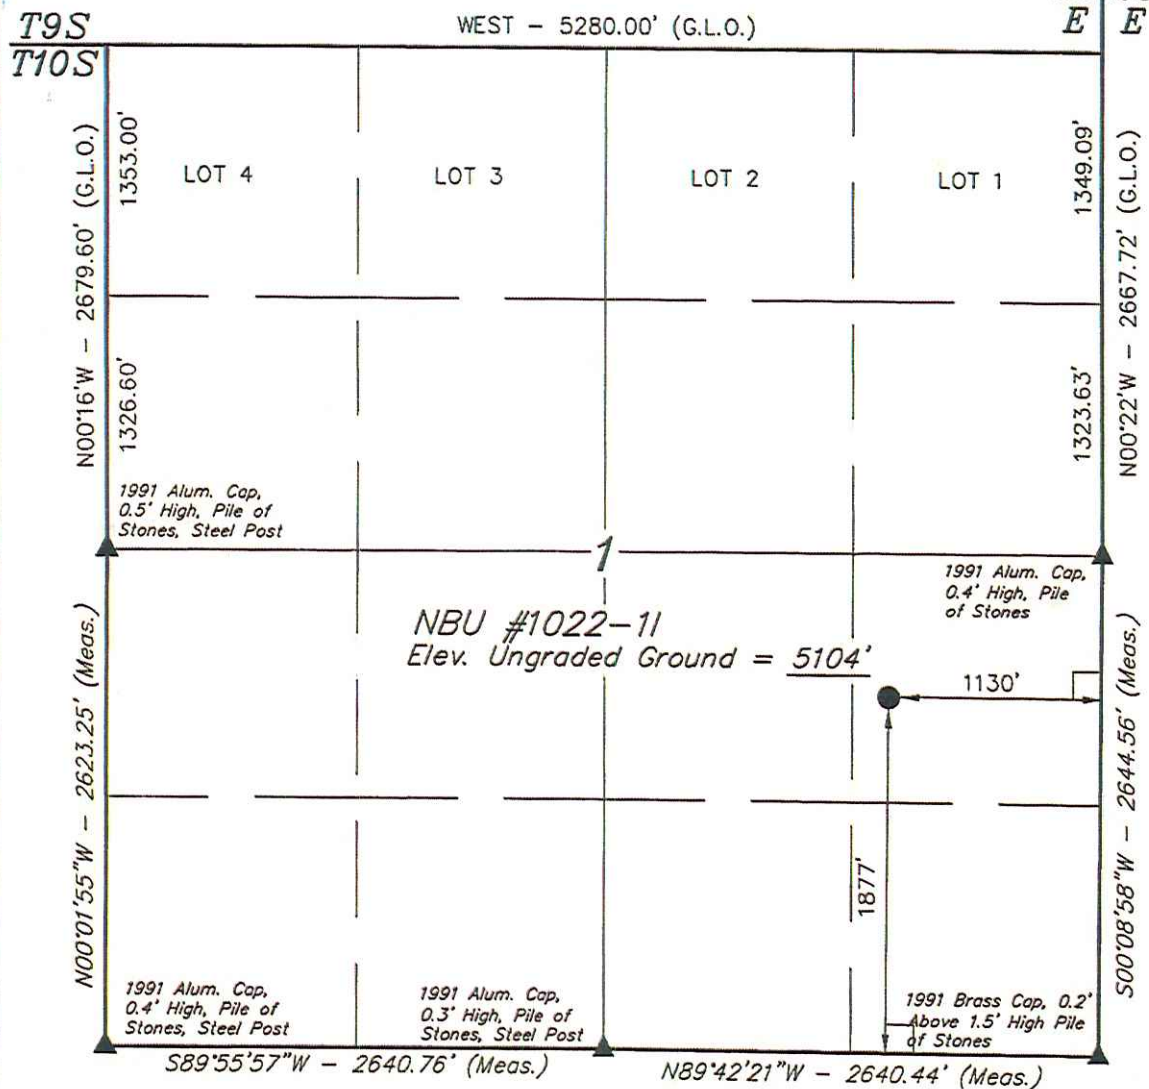

LEGEND:

- └─┘ = 90° SYMBOL
- = PROPOSED WELL HEAD.
- ▲ = SECTION CORNERS LOCATED.

(NAD 83)
LATITUDE = 39°58'32.96" (39.975822)
LONGITUDE = 109°22'58.23" (109.382842)
(NAD 27)
LATITUDE = 39°58'33.08" (39.975856)
LONGITUDE = 109°22'55.78" (109.382161)

APL Well No: 43047500750000

Kerr-McGee Oil & Gas Onshore LP


FIGURE #1

LOCATION LAYOUT FOR

NBU #1022-11

SECTION 1, T10S, R22E, S.L.B.&M.

1877' FSL 1130' FEL

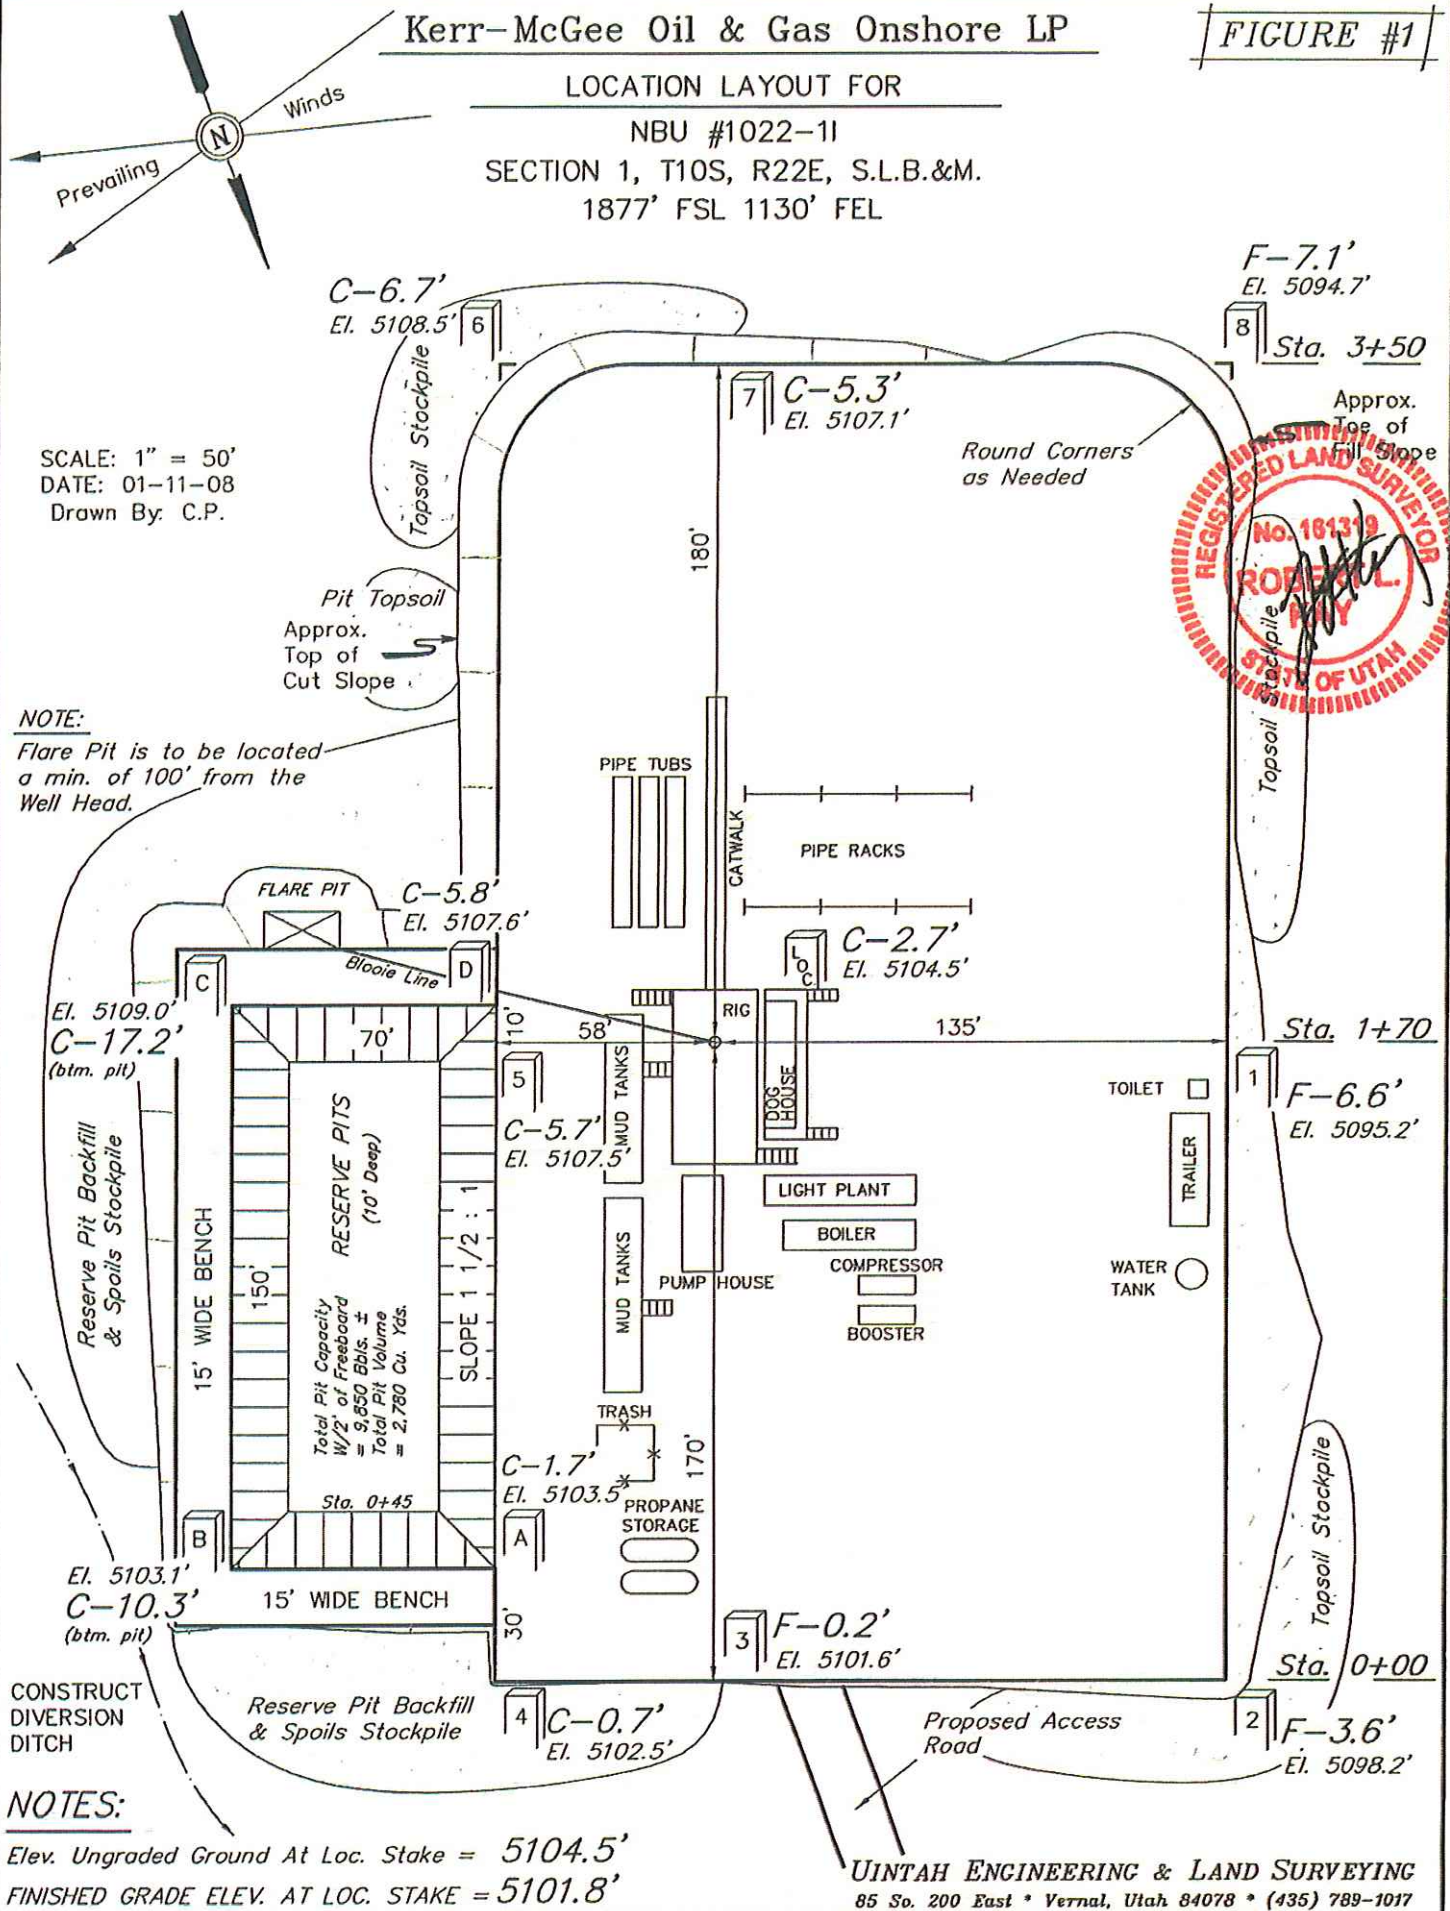

Kerr-McGee Oil & Gas Onshore LP

FIGURE #2

TYPICAL CROSS SECTIONS FOR

NBU #1022-11

SECTION 1, T10S, R22E, S.L.B.&M.

1877' FSL 1130' FEL

1" = 20'
X-Section
Scale
1" = 50'

DATE: 01-11-08

Drawn By: C.P.

Preconstruction
Grade

58'

135'

CUT

Finished Grade

FILL

STA. 3+50



15'

BENCH

70'

58'

135'

CUT

Location Stake

FILL

STA. 1+70

15'

BENCH

70'

58'

135'

CUT

Slope = 1 1/2:1
(Typ.)

FILL

STA. 0+45

58'

135'

CUT

FILL

STA. 0+00

NOTE:

Topsoil should not be
Stripped Below Finished
Grade on Substructure Area.

* NOTE:

FILL QUANTITY INCLUDES
5% FOR COMPACTION

APPROXIMATE YARDAGES

CUT

(12") Topsoil Stripping = 1,760 Cu. Yds.

Remaining Location = 8,890 Cu. Yds.

TOTAL CUT = 10,650 CU.YDS.


FILL = 6,080 CU.YDS.

EXCESS MATERIAL = 4,570 Cu. Yds.

Topsoil & Pit Backfill = 3,150 Cu. Yds.
(1/2 Pit Vol.)EXCESS UNBALANCE = 1,420 Cu. Yds.
(After Interim Rehabilitation)

UINTAH ENGINEERING & LAND SURVEYING

85 So. 200 East * Vernal, Utah 84078 * (435) 789-1017

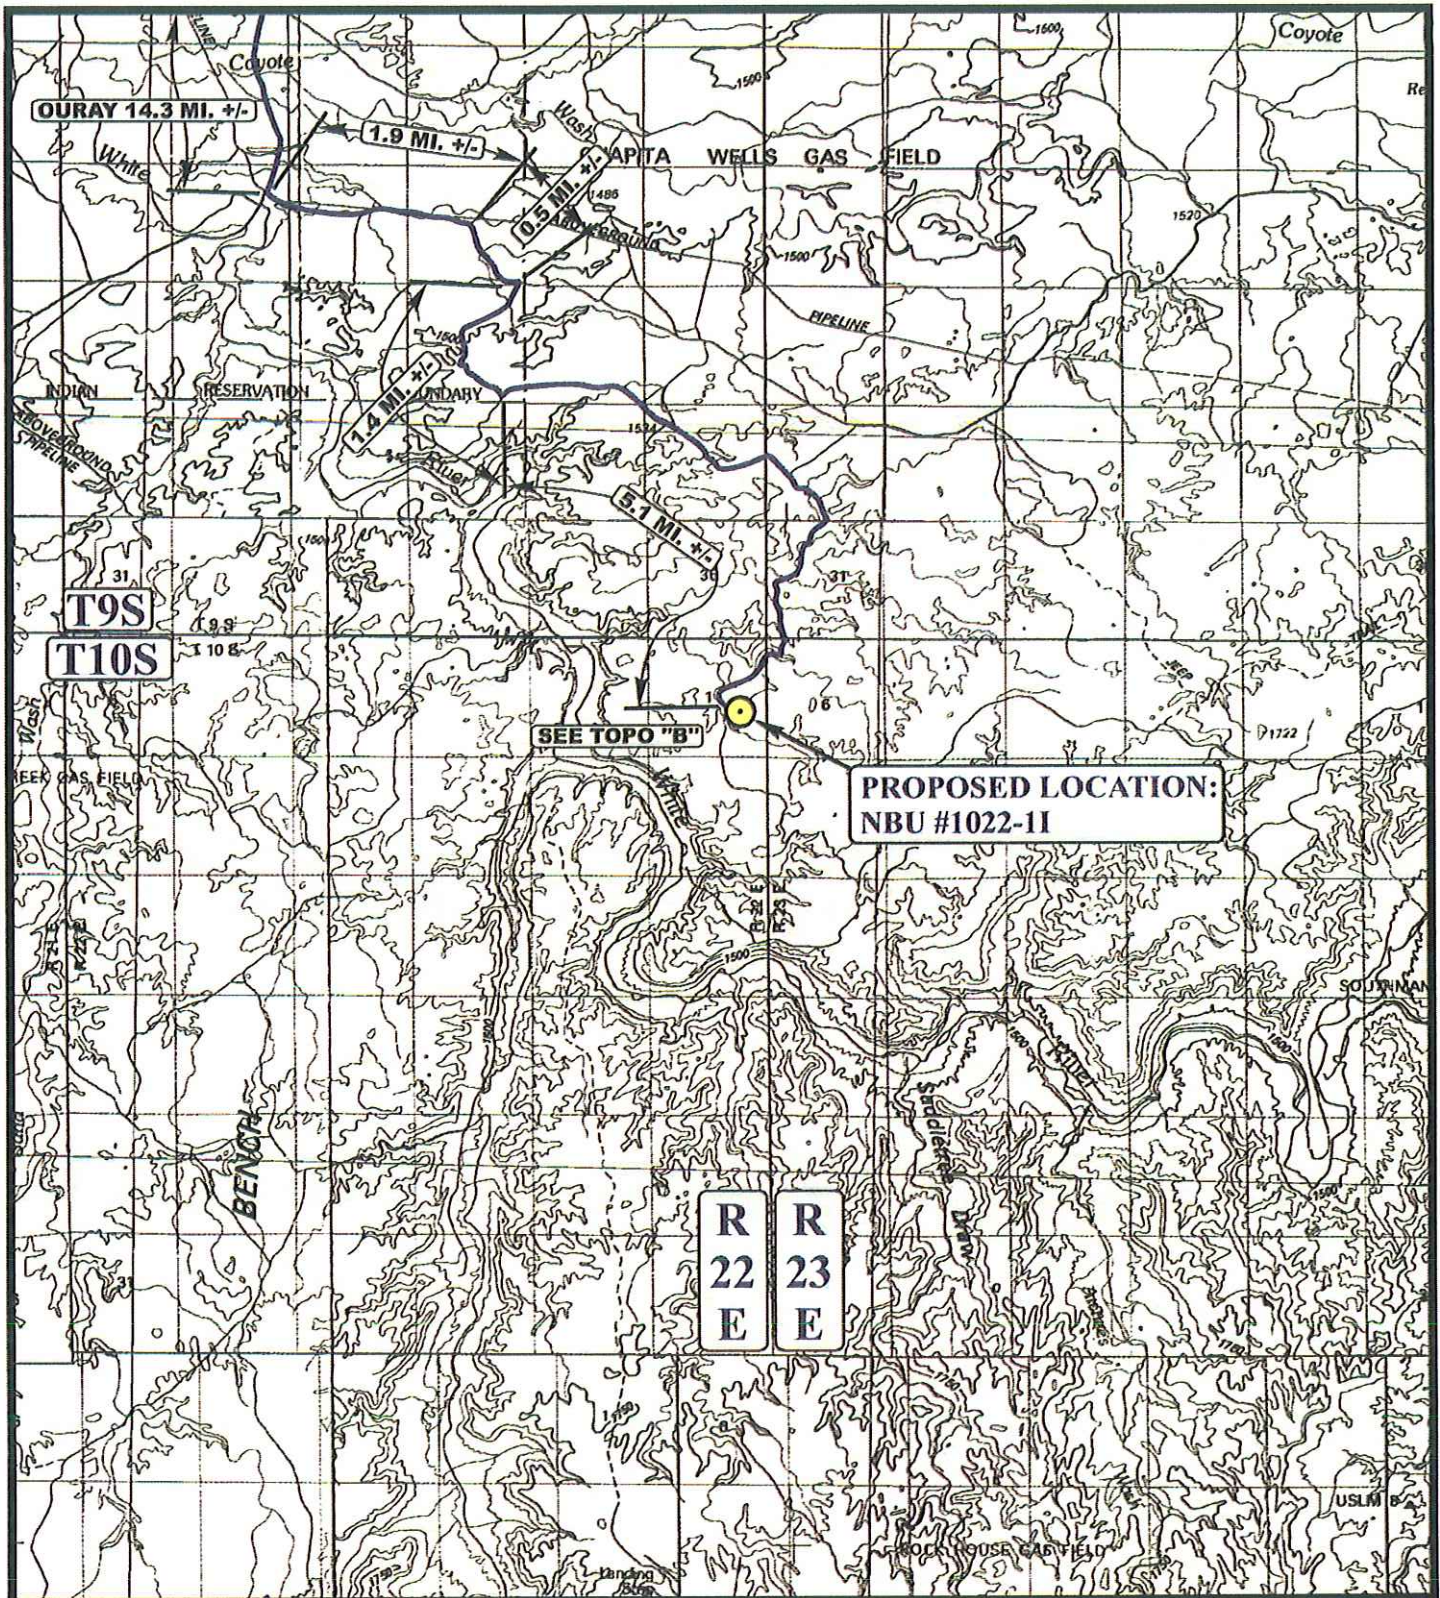**LEGEND:**

PROPOSED LOCATION



Uintah Engineering & Land Surveying
85 South 200 East Vernal, Utah 84078
(435) 789-1017 * FAX (435) 789-1813

TOPOGRAPHIC
MAP

01 29 08
MONTH DAY YEAR

SCALE: 1:100,000

DRAWN BY: GL

REVISED: 00-00-00



 EXISTING ROAD
 PROPOSED ACCESS ROAD



Kerr McGee Oil & Gas Onshore LP

NBU #1022-1I

SECTION 1, T10S, R22E, S.L.B.&M.

1877' FSL 1130' FEL



Uintah Engineering & Land Surveying
85 South 200 East Vernal, Utah 84078
(435) 789-1017 * FAX (435) 789-1813

TOPOGRAPHIC
MAP

01	29	08
MONTH	DAY	YEAR

B
TOPO


SCALE: 1" = 2000'	DRAWN BY: G.L.	REVISED: 00-00-00
-------------------	----------------	-------------------

N

UEIS

C
TOPO

SCALE: 1" = 2000'	DRAWN BY: G.L.	REVISED: 00-00-00
-------------------	----------------	-------------------

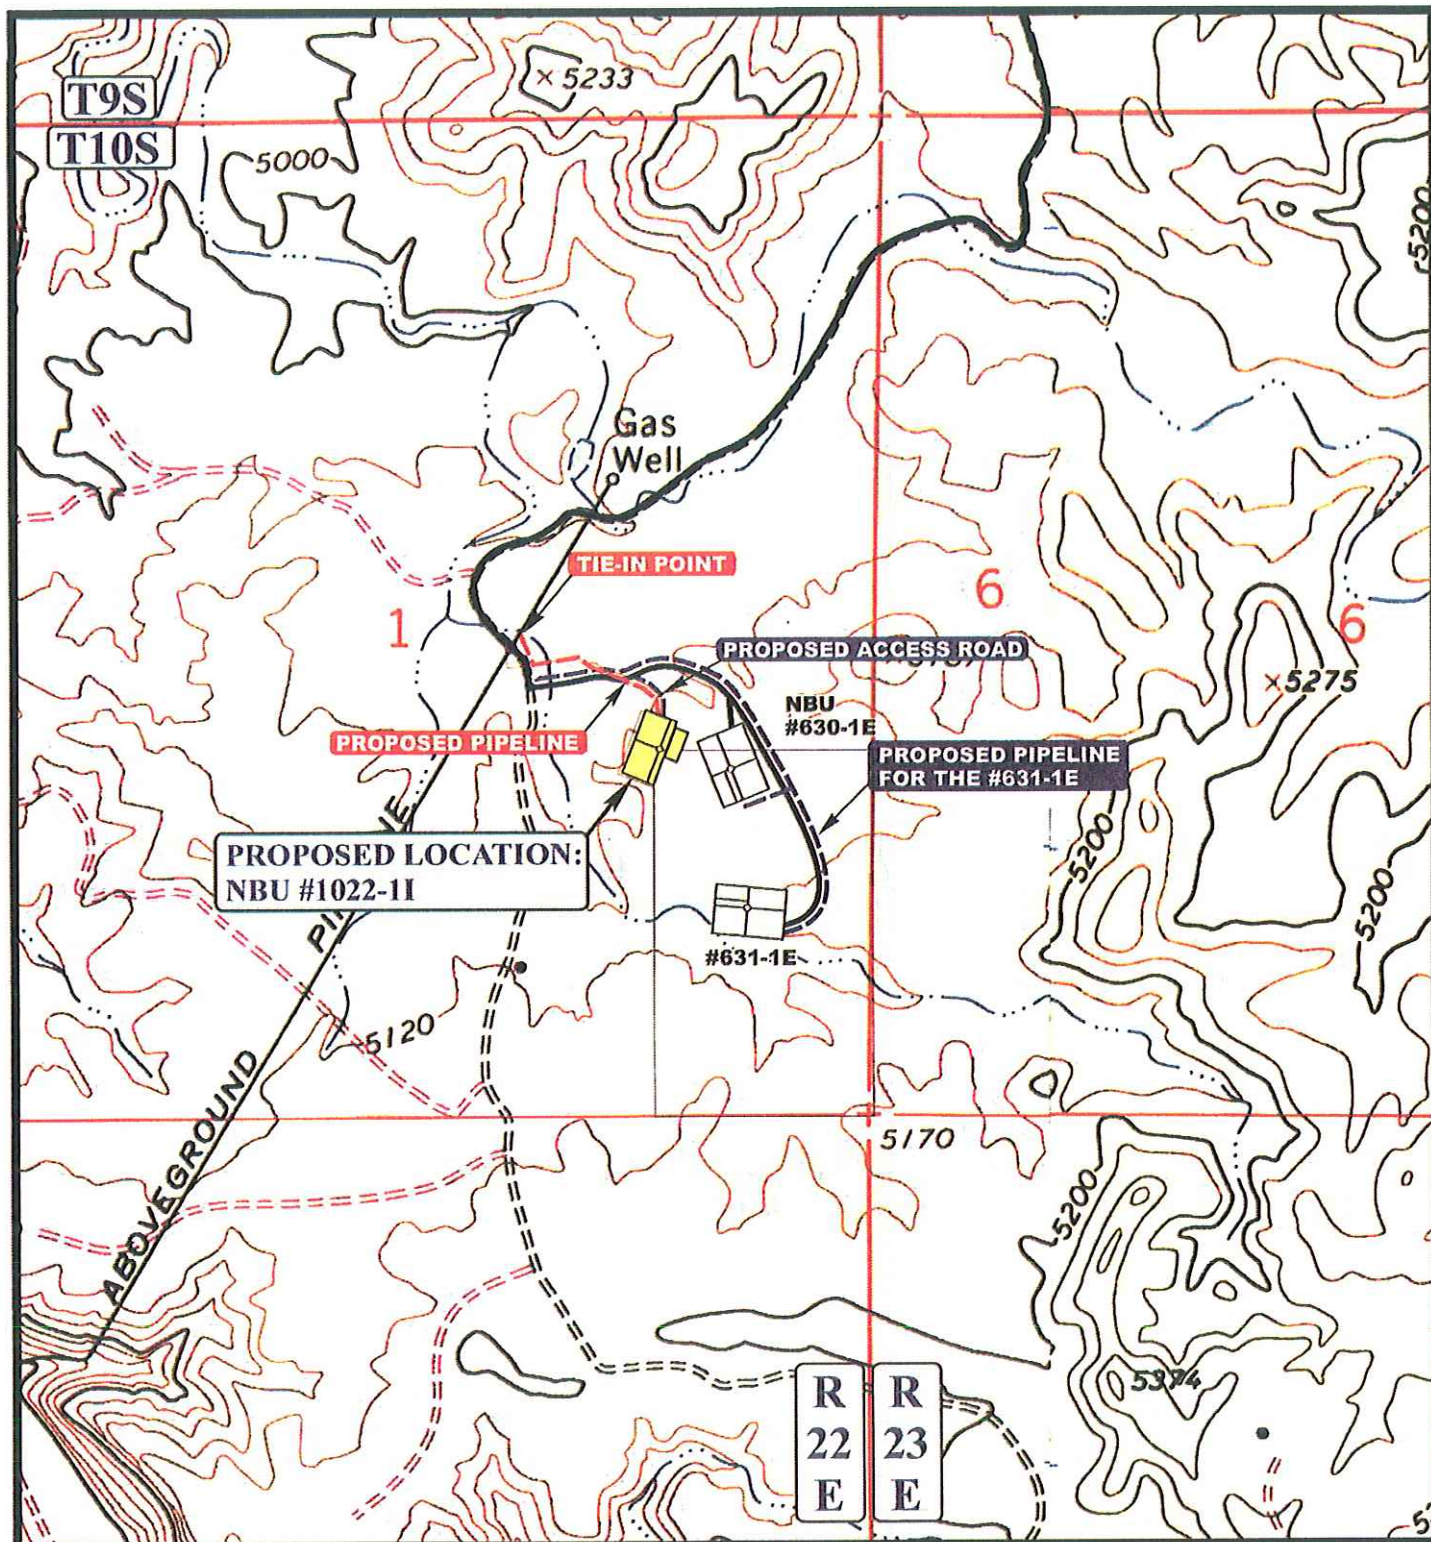

APPROXIMATE TOTAL PIPELINE DISTANCE = 1540' +/-

LEGEND:

- PROPOSED ACCESS ROAD
- - - - - PROPOSED PIPELINE
- - - - - PROPOSED PIPELINE (SERVICING OTHER WELLS)



Kerr McGee Oil & Gas Onshore LP

NBU #1022-1I

SECTION 1, T10S, R22E, S.L.B.&M.

1877' FSL 1129' FEL



Uintah Engineering & Land Surveying
 85 South 200 East Vernal, Utah 84078
 (435) 789-1017 * FAX (435) 789-1813

**TOPOGRAPHIC
MAP**

01 29 08
 MONTH DAY YEAR

SCALE: 1" = 1000' DRAWN BY: GL. REVISED: 00-00-00



CAUSE: 173-14 / 12-2-1999

Field Status	Unit Status
ABANDONED	EXPLORATORY
ACTIVE	GAS STORAGE
COMBINED	NF PP OIL
INACTIVE	NF SECONDARY
PROPOSED	PENDING
STORAGE	PI OIL
TERMINATED	PP GAS
	PP GEOTHERML
	PP OIL
	SECONDARY
	TERMINATED

Wells Status

	GAS INJECTION
	GAS STORAGE
	LOCATION ABANDONED
	NEW LOCATION
	PLUGGED & ABANDONED
	PRODUCING GAS
	PRODUCING OIL
	SHUT-IN GAS
	SHUT-IN OIL
	TEMP. ABANDONED
	TEST WELL
	WATER INJECTION
	WATER SUPPLY
	WATER DISPOSAL
	DRILLING



PREPARED BY: DIANA MASON
DATE: 14-AUGUST-2008

United States Department of the Interior

BUREAU OF LAND MANAGEMENT

Utah State Office

P.O. Box 45155

Salt Lake City, Utah 84145-0155

IN REPLY REFER TO:

3160

(UT-922)

September 2, 2008

Memorandum

To: Assistant District Manager Minerals, Vernal District

From: Michael Coulthard, Petroleum Engineer

Subject: 2008 Plan of Development Natural Buttes Unit
Uintah County, Utah.

Pursuant to email between Diana Whitney, Division of Oil, Gas and Mining, and Mickey Coulthard, Utah State Office, Bureau of Land Management, the following wells are planned for calendar year 2008 within the Natural Buttes Unit, Uintah County, Utah.

API #	WELL NAME	LOCATION
-------	-----------	----------

(Proposed PZ Wasatch/MesaVerde)

43-047-50074	NBU 1022-1N	Sec 01 T10S R22E 0487 FSL 1832 FWL
43-047-50075	NBU 1022-1I	Sec 01 T10S R22E 1877 FSL 1130 FEL
43-047-50076	NBU 1022-1J	Sec 01 T10S R22E 1333 FSL 2201 FEL
43-047-50077	NBU 922-29P	Sec 29 T09S R22E 1076 FSL 0755 FEL
43-047-50078	NBU 922-29P3DS	Sec 29 T09S R22E 1076 FSL 0775 FEL
	BHL	Sec 29 T09S R22E 0256 FSL 0672 FEL
43-047-50079	NBU 922-29P1BS	Sec 29 T09S R22E 1078 FSL 0715 FEL
	BHL	Sec 29 T09S R22E 1267 FSL 0653 FEL
43-047-50073	NBU 922-29P1CS	Sec 29 T09S R22E 1077 FSL 0735 FEL
	BHL	Sec 29 T09S R22E 0927 FSL 0646 FEL
43-047-50072	NBU 921-16J3S	Sec 16 T09S R21E 2136 FSL 0824 FWL
	BHL	Sec 16 T09S R21E 1749 FSL 2595 FEL
43-047-50071	NBU 1022-25O2S	Sec 25 T10S R22E 1255 FSL 2128 FEL
	BHL	Sec 25 T10S R22E 0780 FSL 2080 FEL
43-047-50070	NBU 1022-25J3S	Sec 25 T10S R22E 1311 FSL 2108 FEL
	BHL	Sec 25 T10S R22E 1740 FSL 2000 FEL
43-047-50069	NBU 1022-25J1S	Sec 25 T10S R22E 1293 FSL 2115 FEL
	BHL	Sec 25 T10S R22E 2225 FSL 1940 FEL

Page 2

This office has no objection to permitting the wells at this time.

/s/ Michael L. Coulthard

bcc: File - Natural Buttes Unit
Division of Oil Gas and Mining
Central Files
Agr. Sec. Chron
Fluid Chron

MCoulthard:mc:9-2-08

WORKSHEET

APPLICATION FOR PERMIT TO DRILL

APD RECEIVED: 8/13/2008

API NO. ASSIGNED: 43047500750000

WELL NAME: NBU 1022-1I

OPERATOR: KERR-MCGEE OIL & GAS ONSHORE, L.P. (N2995)

PHONE NUMBER: 720 929-6226

CONTACT: Kevin McIntyre

PROPOSED LOCATION: NESE 1 100S 220E

Permit Tech Review: ☒

SURFACE: 1877 FSL 1130 FEL

Engineering Review: ☐

BOTTOM: 1877 FSL 1130 FEL

Geology Review: ☒

COUNTY: UINTAH

LATITUDE: 39.97589

LONGITUDE: -109.38231

UTM SURF EASTINGS: 638141.00

NORTHINGS: 4426125.00

FIELD NAME: NATURAL BUTTES

LEASE TYPE: 1 - Federal

LEASE NUMBER: UTU-011336

PROPOSED FORMATION: WSMVD

SURFACE OWNER: 1 - Federal

COALBED METHANE: NO

RECEIVED AND/OR REVIEWED:

☒ **PLAT**

☒ **Bond:** FEDERAL - WYB000291

☐ **Potash**

☒ **Oil Shale 190-5**

☐ **Oil Shale 190-3**

☐ **Oil Shale 190-13**

☒ **Water Permit:** Water permit # 43-8496

☐ **RDCC Review:**

☐ **Fee Surface Agreement**

☐ **Intent to Commingle**

LOCATION AND SITING:

☐ **R649-2-3.**

Unit: NATURAL BUTTES

☐ **R649-3-2. General**

☐ **R649-3-3. Exception**

☒ **Drilling Unit**

Board Cause No: 173-14

Effective Date: 12/22/1999

Siting: 460' fr u bdry & uncomm. tract

☐ **R649-3-11. Directional Drill**

Comments: Presite Completed

Stipulations: 4 - Federal Approval - dmason
17 - Oil Shale 190-5(b) - dmason



JON M. HUNTSMAN, JR.
Governor

GARY R. HERBERT
Lieutenant Governor

State of Utah

DEPARTMENT OF NATURAL RESOURCES

MICHAEL R. STYLER
Executive Director

Division of Oil, Gas and Mining

JOHN R. BAZA
Division Director

Permit To Drill

Well Name: NBU 1022-11
API Well Number: 43047500750000
Lease Number: UTU-011336
Surface Owner: FEDERAL
Approval Date: 9/15/2008

Issued to:

KERR-MCGEE OIL & GAS ONSHORE, L.P. , P.O. Box 173779, Denver, CO 80217

Authority:

Pursuant to Utah Code Ann. §40-6-1 et seq., and Utah Administrative Code R649-3-1 et seq., the Utah Division of Oil, Gas and Mining issues conditions of approval, and permit to drill the listed well. This permit is issued in accordance with the requirements of CAUSE: 173-14.

Duration:

This approval shall expire one year from the above date unless substantial and continuous operation is underway, or a request for extension is made prior to the expiration date

General:

Compliance with the requirements of Utah Admin. R. 649-1 et seq., the Oil and Gas Conservation General Rules, and the applicable terms and provisions of the approved Application for permit to drill.

Conditions of Approval:

In accordance with the Order in Cause No. 190-5(b) dated October 28, 1982, the operator shall comply with the requirements of Rules R649-3-31 and R649-3-27 pertaining to Designated Oil Shale Areas. Additionally, the operators shall ensure that the surface and or production casing is properly cemented over the entire oil shale section as defined by Rule R649-3-31. The Operator shall report the actual depth the oil shale is encountered to the division.

State approval of this well does not supercede the required federal approval, which must be obtained prior to drilling.

Notification Requirements:

Notify the Division with 24 hours of spudding the well.

- Contact Carol Daniels at (801) 538-5284.


Notify the Division prior to commencing operations to plug and abandon the well.

- Contact Dustin Doucet at (801) 538-5281 office (801) 733-0983 home

Reporting Requirements:

All required reports, forms and submittals will be promptly filed with the Division, including but not limited to the Entity Action Form (Form 6), Report of Water Encountered During Drilling (Form 7), Weekly Progress Reports for drilling and completion operations, and Sundry Notices and Reports on Wells requesting approval of change of plans or other operational actions.

Approved By:

A handwritten signature in black ink, appearing to read "Gil Hunt", with a stylized, flowing script.

Gil Hunt
Associate Director, Oil & Gas

STATE OF UTAH DEPARTMENT OF NATURAL RESOURCES DIVISION OF OIL, GAS, AND MINING		FORM 9			
SUNDRY NOTICES AND REPORTS ON WELLS Do not use this form for proposals to drill new wells, significantly deepen existing wells below current bottom-hole depth, reenter plugged wells, or to drill horizontal laterals. Use APPLICATION FOR PERMIT TO DRILL form for such proposals.		5. LEASE DESIGNATION AND SERIAL NUMBER: UTU-011336			
1. TYPE OF WELL Gas Well		6. IF INDIAN, ALLOTTEE OR TRIBE NAME:			
2. NAME OF OPERATOR: KERR-MCGEE OIL & GAS ONSHORE, L.P.		7. UNIT or CA AGREEMENT NAME: NATURAL BUTTES			
3. ADDRESS OF OPERATOR: P.O. Box 173779 1099 18th Street, Suite 600, Denver, CO, 80217 3779		8. WELL NAME and NUMBER: NBU 1022-11			
4. LOCATION OF WELL FOOTAGES AT SURFACE: 1877 FSL 1130 FEL QTR/QTR, SECTION, TOWNSHIP, RANGE, MERIDIAN: Qtr/Qtr: NESE Section: 1 Township: 10.0S Range: 22.0E Meridian: S		9. API NUMBER: 43047500750000			
PHONE NUMBER: 720 929-6007 Ext		9. FIELD and POOL or WILDCAT: NATURAL BUTTES			
COUNTY: UTAH		STATE: UTAH			
11. CHECK APPROPRIATE BOXES TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA					
TYPE OF SUBMISSION	TYPE OF ACTION				
<input checked="" type="checkbox"/> NOTICE OF INTENT Approximate date work will start: 8/30/2009 <input type="checkbox"/> SUBSEQUENT REPORT Date of Work Completion: <input type="checkbox"/> SPUD REPORT Date of Spud: <input type="checkbox"/> DRILLING REPORT Report Date:	<table style="width: 100%; border: none;"> <tr> <td style="width: 33%; vertical-align: top;"> <input type="checkbox"/> ACIDIZE <input type="checkbox"/> CHANGE TO PREVIOUS PLANS <input type="checkbox"/> CHANGE WELL STATUS <input type="checkbox"/> DEEPEN <input type="checkbox"/> OPERATOR CHANGE <input type="checkbox"/> PRODUCTION START OR RESUME <input type="checkbox"/> REPERFORATE CURRENT FORMATION <input type="checkbox"/> TUBING REPAIR <input type="checkbox"/> WATER SHUTOFF <input type="checkbox"/> WILDCAT WELL DETERMINATION </td> <td style="width: 33%; vertical-align: top;"> <input type="checkbox"/> ALTER CASING <input type="checkbox"/> CHANGE TUBING <input type="checkbox"/> COMMINGLE PRODUCING FORMATIONS <input type="checkbox"/> FRACTURE TREAT <input type="checkbox"/> PLUG AND ABANDON <input type="checkbox"/> RECLAMATION OF WELL SITE <input type="checkbox"/> SIDETRACK TO REPAIR WELL <input type="checkbox"/> VENT OR FLARE <input type="checkbox"/> SI TA STATUS EXTENSION <input type="checkbox"/> OTHER </td> <td style="width: 33%; vertical-align: top;"> <input type="checkbox"/> CASING REPAIR <input type="checkbox"/> CHANGE WELL NAME <input type="checkbox"/> CONVERT WELL TYPE <input type="checkbox"/> NEW CONSTRUCTION <input type="checkbox"/> PLUG BACK <input type="checkbox"/> RECOMPLETE DIFFERENT FORMATION <input type="checkbox"/> TEMPORARY ABANDON <input type="checkbox"/> WATER DISPOSAL <input checked="" type="checkbox"/> APD EXTENSION OTHER: </td> </tr> </table>		<input type="checkbox"/> ACIDIZE <input type="checkbox"/> CHANGE TO PREVIOUS PLANS <input type="checkbox"/> CHANGE WELL STATUS <input type="checkbox"/> DEEPEN <input type="checkbox"/> OPERATOR CHANGE <input type="checkbox"/> PRODUCTION START OR RESUME <input type="checkbox"/> REPERFORATE CURRENT FORMATION <input type="checkbox"/> TUBING REPAIR <input type="checkbox"/> WATER SHUTOFF <input type="checkbox"/> WILDCAT WELL DETERMINATION	<input type="checkbox"/> ALTER CASING <input type="checkbox"/> CHANGE TUBING <input type="checkbox"/> COMMINGLE PRODUCING FORMATIONS <input type="checkbox"/> FRACTURE TREAT <input type="checkbox"/> PLUG AND ABANDON <input type="checkbox"/> RECLAMATION OF WELL SITE <input type="checkbox"/> SIDETRACK TO REPAIR WELL <input type="checkbox"/> VENT OR FLARE <input type="checkbox"/> SI TA STATUS EXTENSION <input type="checkbox"/> OTHER	<input type="checkbox"/> CASING REPAIR <input type="checkbox"/> CHANGE WELL NAME <input type="checkbox"/> CONVERT WELL TYPE <input type="checkbox"/> NEW CONSTRUCTION <input type="checkbox"/> PLUG BACK <input type="checkbox"/> RECOMPLETE DIFFERENT FORMATION <input type="checkbox"/> TEMPORARY ABANDON <input type="checkbox"/> WATER DISPOSAL <input checked="" type="checkbox"/> APD EXTENSION OTHER:
<input type="checkbox"/> ACIDIZE <input type="checkbox"/> CHANGE TO PREVIOUS PLANS <input type="checkbox"/> CHANGE WELL STATUS <input type="checkbox"/> DEEPEN <input type="checkbox"/> OPERATOR CHANGE <input type="checkbox"/> PRODUCTION START OR RESUME <input type="checkbox"/> REPERFORATE CURRENT FORMATION <input type="checkbox"/> TUBING REPAIR <input type="checkbox"/> WATER SHUTOFF <input type="checkbox"/> WILDCAT WELL DETERMINATION	<input type="checkbox"/> ALTER CASING <input type="checkbox"/> CHANGE TUBING <input type="checkbox"/> COMMINGLE PRODUCING FORMATIONS <input type="checkbox"/> FRACTURE TREAT <input type="checkbox"/> PLUG AND ABANDON <input type="checkbox"/> RECLAMATION OF WELL SITE <input type="checkbox"/> SIDETRACK TO REPAIR WELL <input type="checkbox"/> VENT OR FLARE <input type="checkbox"/> SI TA STATUS EXTENSION <input type="checkbox"/> OTHER	<input type="checkbox"/> CASING REPAIR <input type="checkbox"/> CHANGE WELL NAME <input type="checkbox"/> CONVERT WELL TYPE <input type="checkbox"/> NEW CONSTRUCTION <input type="checkbox"/> PLUG BACK <input type="checkbox"/> RECOMPLETE DIFFERENT FORMATION <input type="checkbox"/> TEMPORARY ABANDON <input type="checkbox"/> WATER DISPOSAL <input checked="" type="checkbox"/> APD EXTENSION OTHER:			
12. DESCRIBE PROPOSED OR COMPLETED OPERATIONS. Clearly show all pertinent details including dates, depths, volumes, etc. Kerr-McGee Oil & Gas Onshore, L.P. (Kerr-McGee) respectfully requests an extension to this APD for the maximum time allowed. Please contact the undersigned with any questions and/or comments. Thank you.					
<div style="text-align: right;"> Approved by the Utah Division of Oil, Gas and Mining </div>		Date: August 27, 2009			
By:					
NAME (PLEASE PRINT) Danielle Piernot	PHONE NUMBER 720 929-6156	TITLE Regulatory Analyst			
SIGNATURE N/A	DATE 8/26/2009				

RECEIVED August 26, 2009



The Utah Division of Oil, Gas, and Mining

- State of Utah
- Department of Natural Resources

Electronic Permitting System - Sundry Notices

Request for Permit Extension Validation Well Number 43047500750000

API: 43047500750000

Well Name: NBU 1022-1I

Location: 1877 FSL 1130 FEL QTR NESE SEC 1 TWP 100S RNG 220E MER S

Company Permit Issued to: KERR-MCGEE OIL & GAS ONSHORE, L.P.

Date Original Permit Issued: 9/15/2008

The undersigned as owner with legal rights to drill on the property as permitted above, hereby verifies that the information as submitted in the previously approved application to drill, remains valid and does not require revision. Following is a checklist of some items related to the application, which should be verified.

- If located on private land, has the ownership changed, if so, has the surface agreement been updated? ☐ Yes ☒ No
- Have any wells been drilled in the vicinity of the proposed well which would affect the spacing or siting requirements for this location? ☐ Yes ☒ No
- Has there been any unit or other agreements put in place that could affect the permitting or operation of this proposed well? ☐ Yes ☒ No
- Have there been any changes to the access route including ownership, or rightof- way, which could affect the proposed location? ☐ Yes ☒ No
- Has the approved source of water for drilling changed? ☐ Yes ☒ No
- Have there been any physical changes to the surface location or access route which will require a change in plans from what was discussed at the onsite evaluation? ☐ Yes ☒ No
- Is bonding still in place, which covers this proposed well? ☒ Yes ☐ No

**Approved by the
Utah Division of
Oil, Gas and Mining**

Signature: Danielle Piernot

Date: 8/26/2009

Title: Regulatory Analyst **Representing:** KERR-MCGEE OIL & GAS ONSHORE, L.P.

Date: August 27, 2009

By: 

RECEIVED August 26, 2009



United States Department of the Interior

BUREAU OF LAND MANAGEMENT

Green River District-Vernal Field Office

170 South 500 East

Vernal, UT 84078

(435) 781-4400 Fax: (435) 781-4410

<http://www.blm.gov/ut/st/en/fo/vernal.html>



IN REPLY REFER TO:

3160

UTG011

April 23, 2010

Kathy Schneebeck Dulnoan
Kerr McGee Oil & Gas Onshore LP
PO Box 173779
Denver, CO 80217-3779

43-047-50075

Re: Request to Return APD
Well No. NBU 1022-11
NESE, Sec. 1, T10S, R22E
Uintah County, Utah
Lease No. UTU-011336
Natural Buttes Unit

Dear Kathy:

The Application for Permit to Drill (APD) for the above referenced well received in this office on August 14, 2008, is being returned unapproved per your request to this office in an email message to Natural Resource Specialist Dave Gordon received on April 12, 2010. If you intend to drill at this location at a future date, a new APD must be submitted.

If you have any questions regarding APD processing, please contact me at (435) 781-4455.

Sincerely,

Cindy Severson

Cindy Severson
Land Law Examiner

cc: UDOGM

RECEIVED

MAY 19 2010

DIV. OF OIL, GAS & MINING

STATE OF UTAH DEPARTMENT OF NATURAL RESOURCES DIVISION OF OIL, GAS, AND MINING		FORM 9
SUNDRY NOTICES AND REPORTS ON WELLS Do not use this form for proposals to drill new wells, significantly deepen existing wells below current bottom-hole depth, reenter plugged wells, or to drill horizontal laterals. Use APPLICATION FOR PERMIT TO DRILL form for such proposals.		5. LEASE DESIGNATION AND SERIAL NUMBER: UTU-011336
1. TYPE OF WELL Gas Well		6. IF INDIAN, ALLOTTEE OR TRIBE NAME:
2. NAME OF OPERATOR: KERR-MCGEE OIL & GAS ONSHORE, L.P.		7. UNIT or CA AGREEMENT NAME: NATURAL BUTTES
3. ADDRESS OF OPERATOR: P.O. Box 173779 1099 18th Street, Suite 600, Denver, CO, 80217 3779		8. WELL NAME and NUMBER: NBU 1022-11
4. LOCATION OF WELL FOOTAGES AT SURFACE: 1877 FSL 1130 FEL QTR/QTR, SECTION, TOWNSHIP, RANGE, MERIDIAN: Qtr/Qtr: NESE Section: 01 Township: 10.0S Range: 22.0E Meridian: S		9. API NUMBER: 43047500750000
PHONE NUMBER: 720 929-6007 Ext		9. FIELD and POOL or WILDCAT: NATURAL BUTTES
COUNTY: UTAH		STATE: UTAH

11. CHECK APPROPRIATE BOXES TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

TYPE OF SUBMISSION	TYPE OF ACTION		
<input checked="" type="checkbox"/> NOTICE OF INTENT Approximate date work will start: 9/15/2010 <input type="checkbox"/> SUBSEQUENT REPORT Date of Work Completion: <input type="checkbox"/> SPUD REPORT Date of Spud: <input type="checkbox"/> DRILLING REPORT Report Date:	<input type="checkbox"/> ACIDIZE <input type="checkbox"/> CHANGE TO PREVIOUS PLANS <input type="checkbox"/> CHANGE WELL STATUS <input type="checkbox"/> DEEPEN <input type="checkbox"/> OPERATOR CHANGE <input type="checkbox"/> PRODUCTION START OR RESUME <input type="checkbox"/> REPERFORATE CURRENT FORMATION <input type="checkbox"/> TUBING REPAIR <input type="checkbox"/> WATER SHUTOFF <input type="checkbox"/> WILDCAT WELL DETERMINATION	<input type="checkbox"/> ALTER CASING <input type="checkbox"/> CHANGE TUBING <input type="checkbox"/> COMMINGLE PRODUCING FORMATIONS <input type="checkbox"/> FRACTURE TREAT <input type="checkbox"/> PLUG AND ABANDON <input type="checkbox"/> RECLAMATION OF WELL SITE <input type="checkbox"/> SIDETRACK TO REPAIR WELL <input type="checkbox"/> VENT OR FLARE <input type="checkbox"/> SI TA STATUS EXTENSION <input type="checkbox"/> OTHER	<input type="checkbox"/> CASING REPAIR <input type="checkbox"/> CHANGE WELL NAME <input type="checkbox"/> CONVERT WELL TYPE <input type="checkbox"/> NEW CONSTRUCTION <input type="checkbox"/> PLUG BACK <input type="checkbox"/> RECOMPLETE DIFFERENT FORMATION <input type="checkbox"/> TEMPORARY ABANDON <input type="checkbox"/> WATER DISPOSAL <input checked="" type="checkbox"/> APD EXTENSION OTHER: <input style="width: 100px;" type="text"/>

12. DESCRIBE PROPOSED OR COMPLETED OPERATIONS. Clearly show all pertinent details including dates, depths, volumes, etc.
 Kerr-McGee Oil & Gas Onshore, L.P. (Kerr-McGee) respectfully requests an extension to this APD for the maximum time allowed. Please contact the undersigned with any questions and/or comments. Thank you.

Approved by the
Utah Division of
Oil, Gas and Mining

Date: September 20, 2010

By:

NAME (PLEASE PRINT) Danielle Piernot	PHONE NUMBER 720 929-6156	TITLE Regulatory Analyst
SIGNATURE N/A		DATE 9/15/2010



The Utah Division of Oil, Gas, and Mining

- State of Utah
- Department of Natural Resources

Electronic Permitting System - Sundry Notices

Request for Permit Extension Validation Well Number 43047500750000

API: 43047500750000

Well Name: NBU 1022-1I

Location: 1877 FSL 1130 FEL QTR NESE SEC 01 TWP 100S RNG 220E MER S

Company Permit Issued to: KERR-MCGEE OIL & GAS ONSHORE, L.P.

Date Original Permit Issued: 9/15/2008

The undersigned as owner with legal rights to drill on the property as permitted above, hereby verifies that the information as submitted in the previously approved application to drill, remains valid and does not require revision. Following is a checklist of some items related to the application, which should be verified.

- If located on private land, has the ownership changed, if so, has the surface agreement been updated? ☐ Yes ☒ No
- Have any wells been drilled in the vicinity of the proposed well which would affect the spacing or siting requirements for this location? ☐ Yes ☒ No
- Has there been any unit or other agreements put in place that could affect the permitting or operation of this proposed well? ☐ Yes ☒ No
- Have there been any changes to the access route including ownership, or rightof- way, which could affect the proposed location? ☐ Yes ☒ No
- Has the approved source of water for drilling changed? ☐ Yes ☒ No
- Have there been any physical changes to the surface location or access route which will require a change in plans from what was discussed at the onsite evaluation? ☐ Yes ☒ No
- Is bonding still in place, which covers this proposed well? ☒ Yes ☐ No

Approved by the
Utah Division of
Oil, Gas and Mining

Signature: Danielle Piernot

Date: 9/15/2010

Title: Regulatory Analyst **Representing:** KERR-MCGEE OIL & GAS ONSHORE, L.P.

Date: September 20, 2010

By: 

RECEIVED September 15, 2010



GARY R. HERBERT
Governor

GREG BELL
Lieutenant Governor

State of Utah

DEPARTMENT OF NATURAL RESOURCES

MICHAEL R. STYLER
Executive Director

Division of Oil, Gas and Mining

JOHN R. BAZA
Division Director

November 18, 2011

Kerr-McGee Oil & Gas Onshore, L.P.
P.O. Box 173779.
Denver, CO 80217


Re: APD Rescinded – NBU 1022-1I, Sec. 1, T.10S, R. 22E
Uintah County, Utah API No. 43-047-50075

Ladies and Gentlemen:

The Application for Permit to Drill (APD) for the subject well was approved by the Division of Oil, Gas and Mining (Division) on September 15, 2008. On August 27, 2009 and September 20, 2010 the Division granted a one-year APD extension. No drilling activity at this location has been reported to the division. Therefore, approval to drill the well is hereby rescinded, effective November 18, 2011.

If any previously unreported operations have been performed on this well location, it is imperative that you notify the Division immediately.

Sincerely,


Diana Mason
Environmental Scientist

cc: Well File
Bureau of Land Management, Vernal

